



# Trimble X7

## 3D LASER SCANNING SYSTEM

**High-speed 3D laser scanning system with new innovations to simplify adoption, increase efficiency and provide confidence in the field.**

### Simple

- ▶ Reliable field workflows suitable for all users
- ▶ Intuitive Trimble Perspective software to operate, manage, view and validate scan data
- ▶ Fast image capture with Trimble® VISION™ technology
- ▶ Compact and lightweight for easy transport and mobility

### Smart

- ▶ Breakthrough innovations for reliable data collection
- ▶ New Trimble X-Drive deflection system enables automatic calibration to ensure accuracy on every scan with no downtime for calibration service
- ▶ Unique Trimble Registration Assist for automatic registration, refinement, and reports to leave the site with confidence
- ▶ Automated survey grade self-leveling

### Professional

- ▶ Reliable IP55 rating and industry leading 2-year standard warranty
- ▶ High sensitivity time-of-flight EDM to effectively capture dark and reflective surfaces
- ▶ Flexible operation with tablet or one-button workflow
- ▶ Data integration with Trimble and non Trimble software

**Learn more: [geospatial.trimble.com/X7](https://geospatial.trimble.com/X7)**



SYSTEM OVERVIEW						
Trimble X7	High-speed 3D laser scanner with combined servo drive/scanning mirror, integrated imaging, automatic calibration, automated registration technologies and survey-grade self-leveling					
Trimble Perspective	Easy to use software for scanner control, 3D data visualization and processing. Capabilities include automated infield registration, annotations and measurements					
SCANNING PERFORMANCE						
GENERAL						
Scanning EDM Laser Class	Laser class 1, eye safe in accordance with IEC EN60825-1					
Laser Wavelength	1550nm, invisible					
Field of View	360° x 282°					
Scan Duration	Fastest 2 min 34 sec with images, 1 min 34 sec without					
Scan Speed	Up to 500kHz					
RANGE MEASUREMENT						
Range Principle	High speed, digital time-of-flight distance measurement					
Range Noise <sup>1</sup>	<3 mm @ 60 m on 80% albedo <sup>2</sup>					
Range <sup>3</sup>	0.6 m - 80 m					
High Sensitivity Mode	Dark (asphalt) and reflective (stainless steel) surfaces					
SCANNING ACCURACY						
Validation	Guaranteed over lifetime with auto-calibration					
Range Accuracy <sup>1</sup>	2 mm					
Angular Accuracy <sup>1,5</sup>	21"					
3D Point Accuracy <sup>1,5</sup>	2.4 mm @ 10 m, 3.5 mm @ 20 m, 6.0 mm @ 40 m					
SCANNING PARAMETERS						
DURATION <sup>4</sup> (MIN)	SCAN MODE	SPACING (MM) @ 10 M	SPACING (MM) @ 35 M	SPACING (MM) @ 50 M	NUMBER OF POINTS (MPTS)	MAX FILE SIZE (MB)
2	Standard	11	40	57	12	160
4	Standard	5	18	26	58	420
	High Sensitivity	9	33	47	17	190
7	Standard	4	12	18	125	760
	High Sensitivity	6	21	30	42	330
15	High Sensitivity	4	13	19	109	710
IMAGING PERFORMANCE						
Sensors	3 coaxial, calibrated 10MP cameras					
Resolution	3840 x 2746 pixels for each image					
Raw Image Capture	Fast 1 minute - 15 images - 158MP Quality 2 minutes - 30 images - 316MP					
Settings	Auto Exposure Auto White Balance correction and indoor/outdoor presets					
AUTOMATIC LEVEL COMPENSATION						
Type	Automatic Self-leveling, Selectable on/off					
Range	± 5° (Survey Grade), ± 45° (Coarse)					
Upside Down	± 5° (Survey Grade)					
Survey Grade Accuracy	< 3" = 0.3 mm @ 20 m					

# Trimble X7 3D LASER SCANNING SYSTEM

AUTOMATIC CALIBRATION	
Integrated Calibration System	Full auto-calibration of range and angular systems in 25 seconds with no user interaction or targets
Angular Calibration	Applies a correction to the collimation error, i.e., the deviation of the horizontal, vertical or sight axis
Range Calibration	Applies a distance correction in the albedo and the distance measurement
Smart Calibration	Monitors environmental temperature, ambient light, vibration, instrument temperature and vertical speed for optimum performance
TRIMBLE REGISTRATION ASSIST	
Inertial Navigation System	IMU tracks instrument position, orientation and movement
Auto-Registration	Automatic scan orientation and alignment with last or pre-selected scan
Manual Registration	Manual alignment or split screen cloud to cloud
Visual Checks	Dynamic 2D and 3D viewing for QA
Refinement	Automatic registration refinement
Registration Report	Report with project and station average error, overlap and consistency results
GENERAL SPECIFICATIONS	
WEIGHT AND DIMENSIONS	
Instrument (including battery)	5.8 kg (12.78 lbs)
Internal Battery	0.35 kg
Dimensions	178 mm (W) x 353 mm (H) x 170 mm (D)
POWER SUPPLY	
Battery Type	Rechargeable Li-Ion battery 11.1V, 6.5Ah (Standard for Trimble Optical Instruments)
Typical Duration	4 hours per battery
ENVIRONMENTAL	
Operating Temperature	-20 °C to 50 °C (-4 °F to 122 °F)
Storage Temperature	-40 °C to 70 °C (-40 °F to 158 °F)
Ingress Protection Rating	IP55 (dust protected and water jet)
OTHERS	
Remote Control	Trimble T10 tablet or comparable Windows® 10 tablet or laptop via WLAN or USB cable
Push Button	One-button scan operation
Communications / Data Transfer	WLAN 802.11 A/B/G/N/AC or USB Cable
Data Storage	Standard SD Card (32GB SDHC included)
Accessories	<ul style="list-style-type: none"> <li>• Backpack for easy transport and airline carry-on</li> <li>• Lightweight carbon fiber tripod with bell connector</li> <li>• Quick release adapter for X7 and carbon fiber tripod</li> </ul>
Warranty	2 year standard

# Trimble X7 3D LASER SCANNING SYSTEM



## TRIMBLE PERSPECTIVE SOFTWARE

### SYSTEM REQUIREMENTS

Operating System	Microsoft® Windows® 10
Processor	Intel® 6th Generation Core™ i7 2.5 GHz processor or better
RAM	8GB or better
VGA Card	Intel HD Graphics 520 or better
	256 GB Solid State Drive (SSD), (512GB or more for best performance)

### FEATURES

Scanner Operation	Remote control or cable
Trimble Registration Assist	Automatic and manual registration, refinement and reporting.
Data Interaction	2D, 3D and Station View
In-field Documentation	Scan labels, annotations, pictures and measurements
Auto Sync	Automatic data sync from one-button operation
Data Redundancy	Data stored on SD Card and tablet
Data Integration	Export formats to support Trimble and non-Trimble software File formats: TDX, TZF, E57, PTX, RCP, LAS, POD

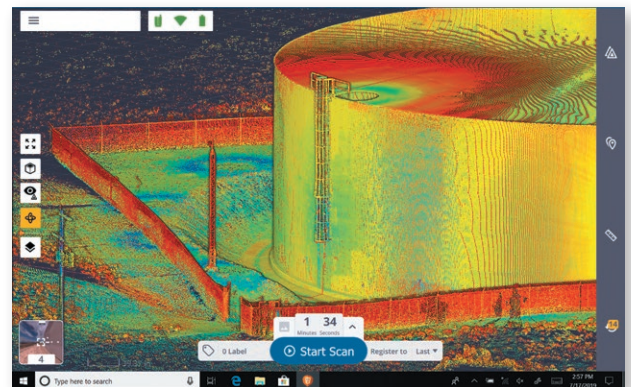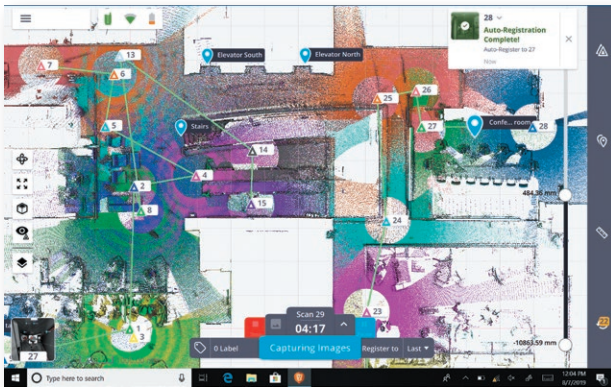

- 1 Specification given as 1 sigma.
- 2 Albedo given @ 1550 nm.
- 3 On matte surface with normal angle of incidence.
- 4 Durations are rounded up to the nearest minute and include auto-calibration.
- 5 When instrument leveled within ± 5.

Specifications subject to change without notice.

Contact your local Trimble Authorized Distribution Partner for more information

**NORTH AMERICA**  
Trimble Inc.  
10368 Westmoor Dr  
Westminster CO 80021  
USA

**EUROPE**  
Trimble Germany GmbH  
Am Prime Parc 11  
65479 Raunheim  
GERMANY

**ASIA-PACIFIC**  
Trimble Navigation  
Singapore PTE Limited  
3 HarbourFront Place  
#13-02 HarbourFront Tower Two  
Singapore 099254  
SINGAPORE